


Sharing Capabilities.

Ljusdesign: In Praise of Shadows Arkitektur AB

# Pole 40

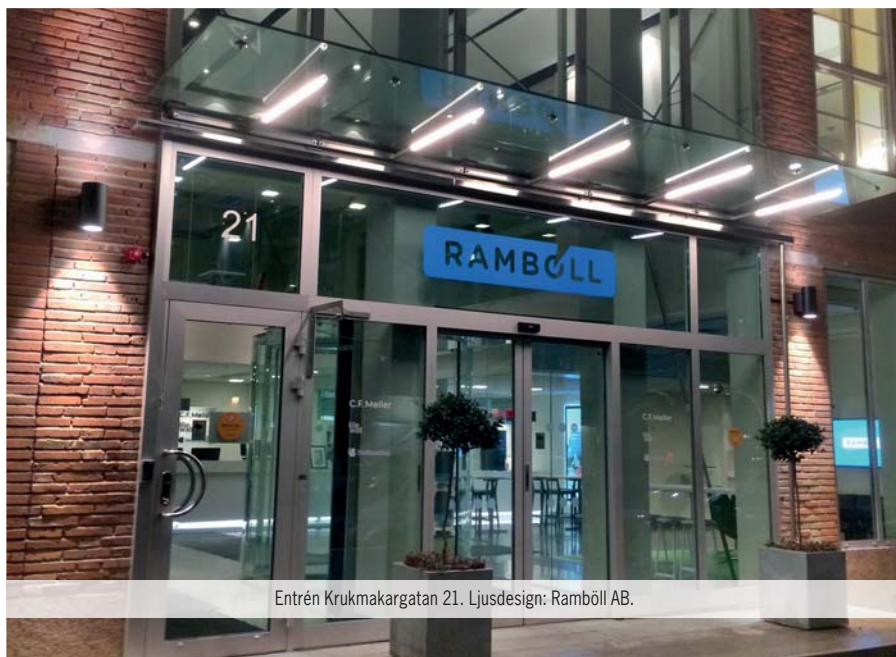

Entrén Krukmakargatan 21. Ljusdesign: Ramböll AB.

	Armatyr för långa linjer med helt jämnt ljus. Upp till 9m armaturer kan kopplas per driver.
	LED 24VDC filtrerad. 2700K / 3000K / 4000K. Tillval: Andra färgtemperaturer. Tillval: Tunable white 2700-5500K. Tillval: RGB.
	230V till extern driver. Fast anslutning (3m kabel). Kabelgenomföring i gavel. Maxlängd armatur per matning: 9,2m. Beakta spänningsfallet vid dimensionering.
	Polykarbonatrör transparent. Grå aluminiumgavlar.
	Pendant: vajer 2m, från vitlackerat stålfäste. Wall: vitlackerat stålfäste.
	1,5 kg per meter profil.

## Pendlad / diktmonterad tak eller vägg



Artikel	Namn
53-87-0X01-53500	Pole 40 pendant 4,3W 318lm 340mm
53-87-0X02-53500	Pole 40 pendant 8,6W 636lm 645mm
53-87-0X03-53500	Pole 40 pendant 12,9W 954lm 950mm
53-87-0X04-53500	Pole 40 pendant 17,2W 1272lm 1255mm
53-87-0X05-53500	Pole 40 pendant 21,5W 1590lm 1560mm
53-87-0X06-53500	Pole 40 pendant 25,8W 1908lm 1865mm
53-87-0X07-53500	Pole 40 pendant 30,1W 2226lm 2170mm
53-87-0X08-53500	Pole 40 pendant 34,1W 2544lm 2475mm
53-87-0X09-53500	Pole 40 pendant 38,7W 2862lm 2780mm
53-87-0X10-53500	Pole 40 pendant 43W 3180lm 3085mm
53-87-0X11-53500	Pole 40 pendant 47,3W 3498lm 3390mm
53-87-0X12-53500	Pole 40 pendant 51,6W 3816lm 3695mm
54-87-0X01-53500	Pole 40 wall 4,3W 318lm 340mm
54-87-0X02-53500	Pole 40 wall 8,6W 636lm 645mm
54-87-0X03-53500	Pole 40 wall 12,9W 954lm 950mm
54-87-0X04-53500	Pole 40 wall 17,2W 1272lm 1255mm
54-87-0X05-53500	Pole 40 wall 21,5W 1590lm 1560mm
54-87-0X06-53500	Pole 40 wall 25,8W 1908lm 1865mm
54-87-0X07-53500	Pole 40 wall 30,1W 2226lm 2170mm
54-87-0X08-53500	Pole 40 wall 34,1W 2544lm 2475mm
54-87-0X09-53500	Pole 40 wall 38,7W 2862lm 2780mm
54-87-0X10-53500	Pole 40 wall 43W 3180lm 3085mm
54-87-0X11-53500	Pole 40 wall 47,3W 3498lm 3390mm
54-87-0X12-53500	Pole 40 wall 51,6W 3816lm 3695mm

Färgtemperatur enligt nedan:

X=2 för 2700K

X=3 för 3000K

X=4 för 4000K

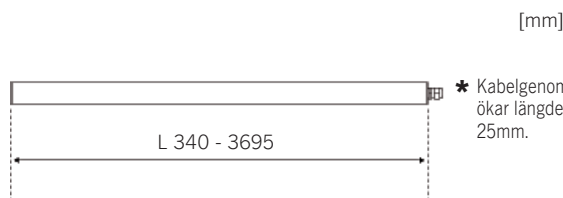


\* Kabelgenomföring ökar längden med 25mm.

## Tillval och fästen

Anges vid beställning:


Intern vidarekoppling (tillval)



Vitlackerat stålfäste (standard pendelfäste)



Vitlackerat stålfäste (standard diktmontering tak / vägg)

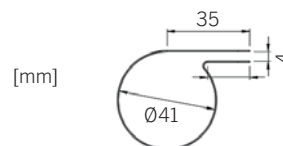

[mm]

## Drivers / LED-info

Artikel	Drivers
810201	LED Driver 24VDC 25VA, IP20
810105	LED Driver 24VDC 60VA, IP20
810106	LED Driver 24VDC 100VA, IP20
810107	LED Driver 24VDC 180VA, IP20
810202	LED Driver 24VDC 25VA IP67
810203	LED Driver 24VDC 60VA IP67
810204	LED Driver 24VDC 100VA IP67
810108	LED Driver 24VDC 150VA IP67

Artikel	Drivers dimbara
1011141	LED Driver 24VDC 35VA one4all Dim, IP20
1011429	LED Driver 24VDC 60VA one4all Dim, IP20
810293	LED driver 24VDC 100VA one4all Dim, IP20
1010310	LED Driver 24VDC 150VA, one4all Dim, IP20
810216	LED Driver 24VDC 60VA, med 1-10V Dim, IP67
810212	LED Driver 24VDC 150VA, med 1-10V Dim, IP67
810294	LED driver 24VDC 150VA DALI IP67
1007601	LED Driver 24VDC 150VA Dim, IP65*

\* Vridpotentiometer inbyggd i drivern. Min belastning 100W.

Egenskaper LED	Prestanda
Färgtemperatur	Extra varmvit 2700K, 85 lm/W Varmvit 3000K, 90 lm/W Neutralvit 4000K, 90 lm/W
Ra-värde	>90
Brinntid	50.000h (L80)
SDCM	Max 3