

vizULO

Shell

CE RoHS

V 220 - 240
Hz 50
W 7 - 28
lm 745 - 2860
lm/W 102 - 110
K 3000 / 4000
°C +10 to +35
CRI >80

Chromaticity tolerance (initial MacAdam): 3
DALI / Non dimmable
Sensor: MW / RF
Mounting: Surface
Body material: Steel
Body color: White RAL 9016
Cover type: Opal
Warranty 3 - 5 years
50 000 h (L90B50) at Ta = 25 °C
100 000 h (L80B50) at Ta = 25 °C



RoHS
IP44
IK09


Total lumen output for final product can differ from typical data by 7% due to special conditions of LED manufacturing processes.

Last modified | **2019, 6 Decmeber**
Data subject to change



Exploring Shell

The corridor function ensures that light is produced when actually needed.

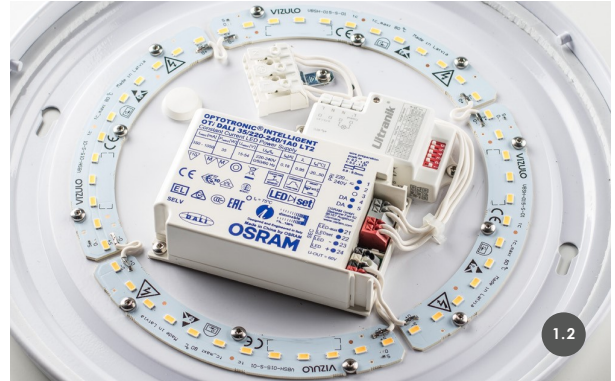

Basic on/off configuration



Functional screw hole slots




| Exploring Shell


Foam gasketing ensures IP44



| Dimensions

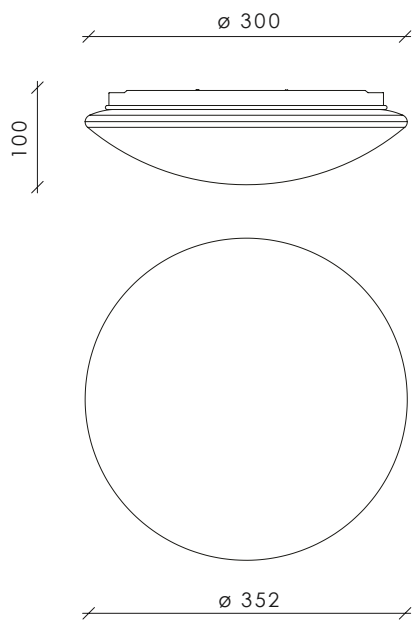


| Optic



Opal

| Model name principles

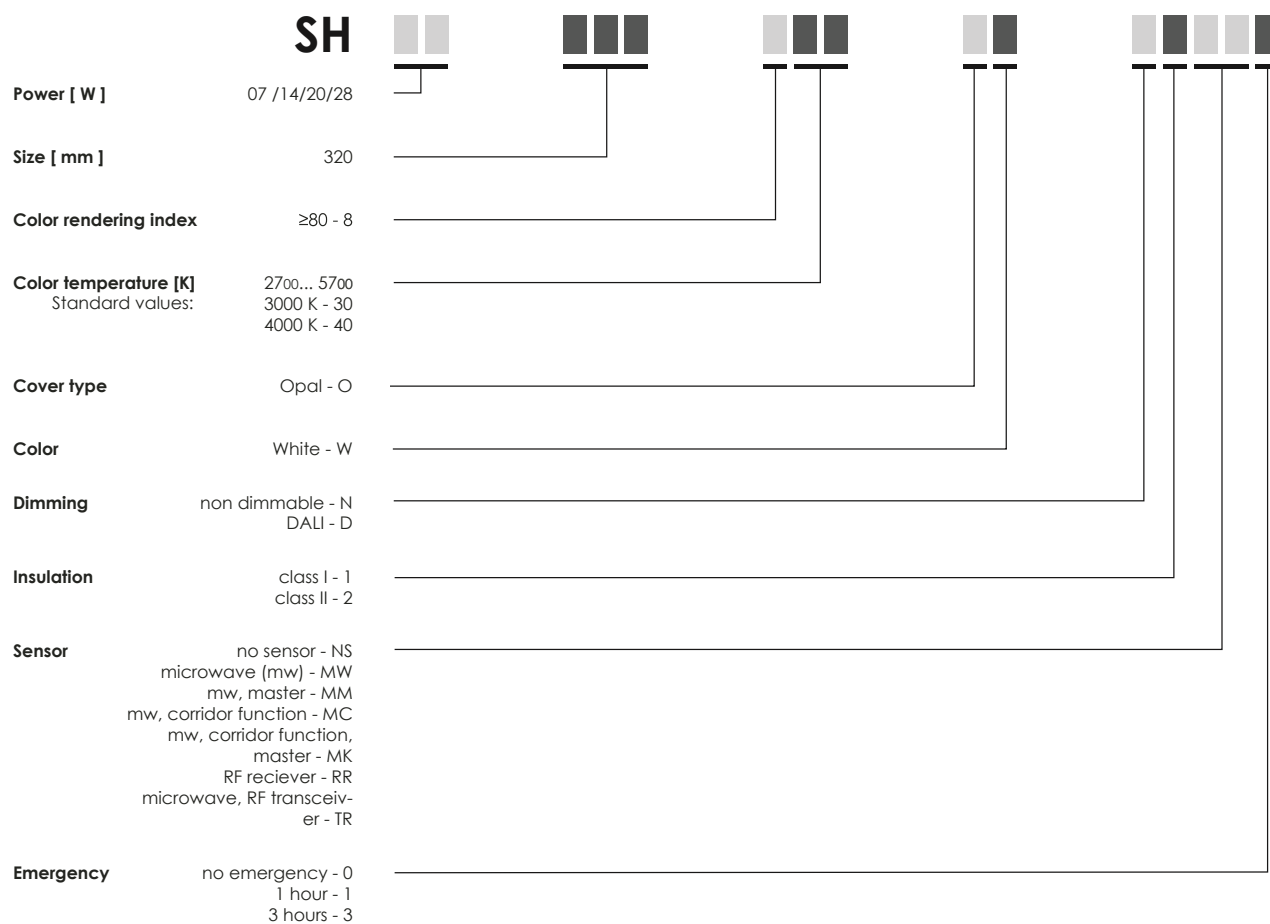

| High quality components

LEDs used



Osram Midpower

Drivers used

First Priority Non dimmable
TRIDONIC



Second Priority Non dimmable
OSARM



HELVAR



First Priority Dali
TRIDONIC



Second Priority Dali
OSRAM



HELVAR



Articles

Non dimmable

Article	Model Number	Rated input power	Size	CCT	Luminous flux, lm	Luminous efficacy, lm/W	Color	Sensor	Cover	Dimming
48000053	SH 12 830 320 OW NNI	12 W	320 mm	3000 K	1191 lm	101 lm/W	White	-	Opal	ND
48000054	SH 19 830 320 OW NNI	19 W	320 mm	3000 K	1888 lm	99 lm/W	White	-	Opal	ND
48000089	SH 19 830 320 OW ND1	19 W	320 mm	3000 K	1900 lm	100 lm/W	White	-	Opal	DALI
48000055	SH 13 830 320 OW YNI	13 W	320 mm	3000 K	1191 lm	91 lm/W	White	yes	Opal	ND
48000056	SH 20 830 320 OW YNI	20 W	320 mm	3000 K	1888 lm	94 lm/W	White	yes	Opal	ND
48000057	SH 12 830 320 OW CD1	12 W	320 mm	3000 K	1191 lm	101 lm/W	White	corridor f.	Opal	DALI
48000058	SH 19 830 320 OW CD1	19 W	320 mm	3000 K	1888 lm	99 lm/W	White	corridor f.	Opal	DALI
48000059	SH 12 840 320 OW NNI	12 W	320 mm	4000 K	1245 lm	104 lm/W	White	-	Opal	ND
48000060	SH 19 840 320 OW NNI	19 W	320 mm	4000 K	1974 lm	103 lm/W	White	-	Opal	ND
48000090	SH 19 840 320 OW ND1	19 W	320 mm	4000 K	2013 lm	105 lm/W	White	-	Opal	DALI
48000061	SH 13 840 320 OW YNI	13 W	320 mm	4000 K	1245 lm	96 lm/W	White	yes	Opal	ND
48000062	SH 20 840 320 OW YNI	20 W	320 mm	4000 K	1974 lm	99 lm/W	White	yes	Opal	ND
48000063	SH 12 840 320 OW CD1	12 W	320 mm	4000 K	1245 lm	104 lm/W	White	corridor f.	Opal	DALI
48000064	SH 19 840 320 OW CD1	19 W	320 mm	4000 K	1974 lm	104 lm/W	White	corridor f.	Opal	DALI
48000069	SH 15 830 320 OW NNI	15 W	320 mm	3000 K	1515 lm	101 lm/W	White	-	Opal	ND
48000070	SH 26 830 320 OW YNI	26 W	320 mm	3000 K	2444 lm	94 lm/W	White	yes	Opal	ND

| **VIZULO**

Starta street 1
Riga, LV - 1026, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

office@vizulo.com
www.vizulo.com



VIZULO



VIZULO_PHOTO

