



Family

Leira


We have designed lighting that will captivate you. The clever Leira will not only win you over with its sleek design but also with the several ways of regulating the intensity of light. The non-dimmable electronic ballast version fits into an ever-lit lobby. This luminaire with a button for dimming is sure to be appreciated, for example at a reception desk. The motion sensor model ensures automatic dimming in a meeting room. And for the office? The best option there is the address unit version that dims on the basis of the detection of people and lights up all the lights in the room and keeps them perfectly lit for work. For an impeccable technical rendition, select LED sources, with Tunable White technology and high-performance TC-L compact fluorescent lamps with a microscopic optical system. Everything is designed so that the Leira facilitates work and prolongs eye health.

Type of installation	Free-standing, Table lamp
Light distribution	Direct-indirect
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white, 2700 K - 6500 K Tunable White
Material	Aluminium
Light source	LED MODUL
LED type	Tunable White
Connection of the luminaires	ON/OFF DALI + sensor Other type of dimming Tunable white
Lifetime	L80/B20 50 000 hours
Warranty	60 months

Luminaire family variants Leira



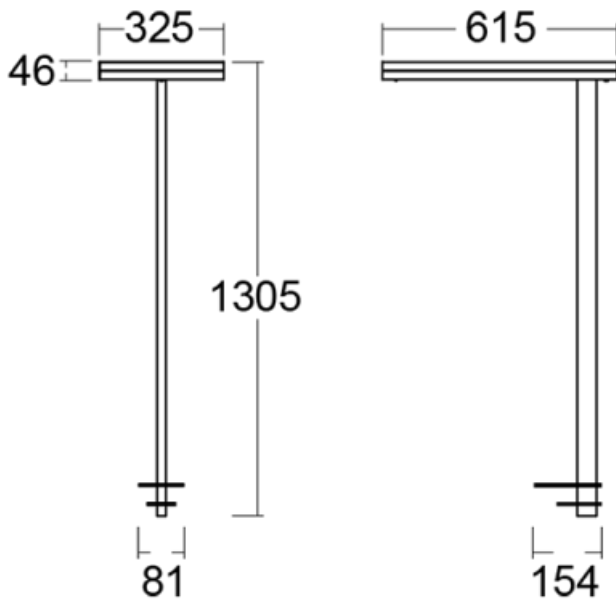

Leira

Assembly

Light distribution


Energy class

A++, A+, A


Marks


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
130-831I-10GEE/840, W	615 × 325 × 1305	73	10330	4000	< 13
131-831I-10GEE/840, W	615 × 325 × 1305	73	10330	4000	< 13

These codes represent white luminaires with chromaticity temperature 4000K and micro-prismatic optical system.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 2700 K - 6500 K Tunable White
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI + sensor Other type of dimming Tunable white
	Ra	80 90

Luminaires come in parts. Their codes are specified in the description of the specific type of luminaire.

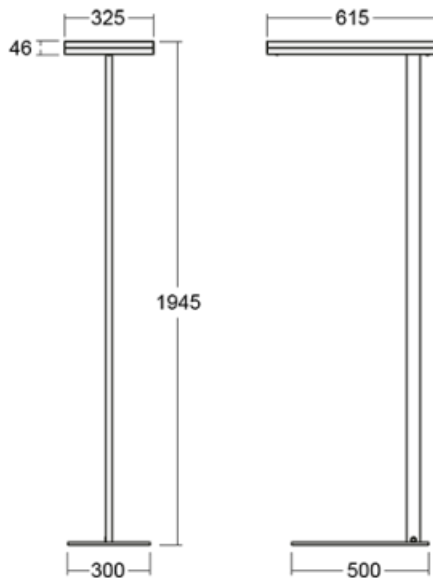Leira

Assembly

Light distribution


Energy class

A++, A+, A


Marks


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
131-731I-10GEE/840, W	615 × 325 × 1945	73	10330	4000	< 13
130-731I-10GEE/840, W	615 × 325 × 1945	73	10330	4000	< 13

These codes represent white luminaires with chromaticity temperature 4000K and micro-prismatic optical system.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 2700 K - 6500 K Tunable White
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI + sensor Other type of dimming Tunable white
	Ra	80 90

Luminaires come in parts. Their codes are specified in the description of the specific type of luminaire.

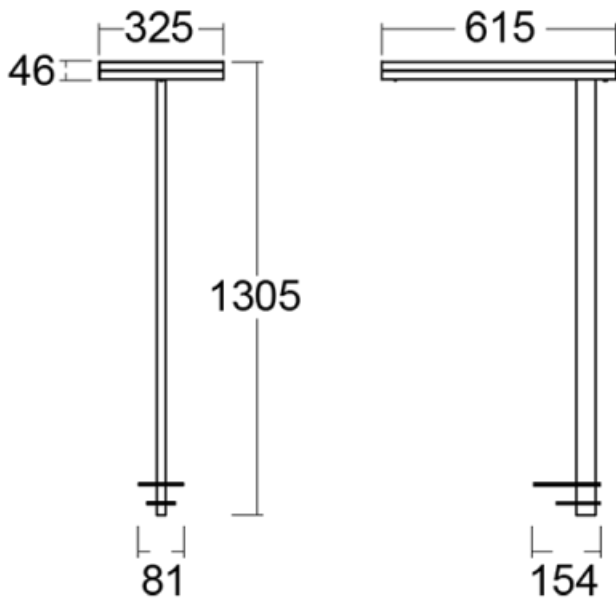Leira

Assembly

Light distribution


Energy class

A++, A+, A


Marks


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
131-821I-10GEE/840, W	615 × 325 × 1305	73	10330	4000	< 13
130-821I-10GEE/840, W	615 × 325 × 1305	73	10330	4000	< 13

These codes represent white luminaires with chromaticity temperature 4000K and micro-prismatic optical system.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 2700 K - 6500 K Tunable White
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI + sensor Other type of dimming Tunable white
	Ra	80 90

Luminaires come in parts. Their codes are specified in the description of the specific type of luminaire.

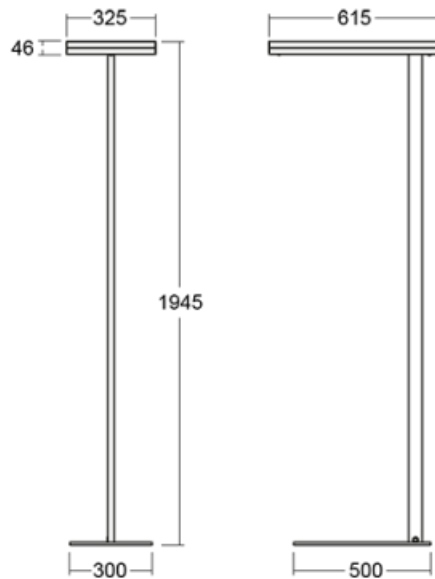Leira

Assembly

Light distribution


Energy class

A++, A+, A

Marks



Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
130-721I-10GEE/840, W	615 × 325 × 1945	73	10330	4000	< 13
131-721I-10GEE/840, W	615 × 325 × 1945	73	10330	4000	< 13

These codes represent white luminaires with chromaticity temperature 4000K and micro-prismatic optical system.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI + sensor Other type of dimming
	Ra	80

Luminaires come in parts. Their codes are specified in the description of the specific type of luminaire.

Leira

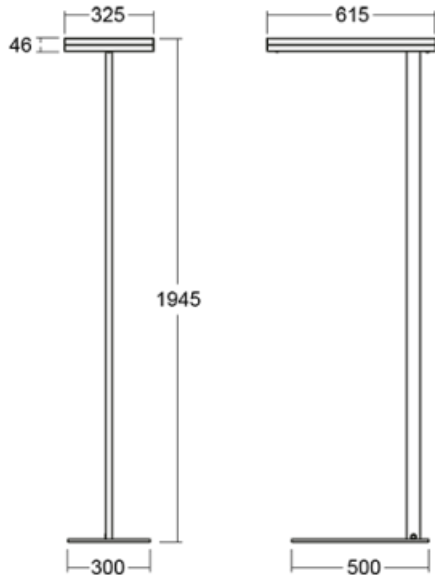

Assembly



Light distribution



Energy class

A++, A+, A

Marks



Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
130-731I-10GXX/840, W	0 x 0 x 0	73	10330	4000	-

These codes represent white luminaires with chromaticity temperature 4000K and micro-prismatic optical system.

Notes

Colour of the
luminaires




Colour Temperature 4000 K cool white

Ra 0

Luminaires come in parts. Their codes are specified in the description of the specific type of luminaire.

Leira

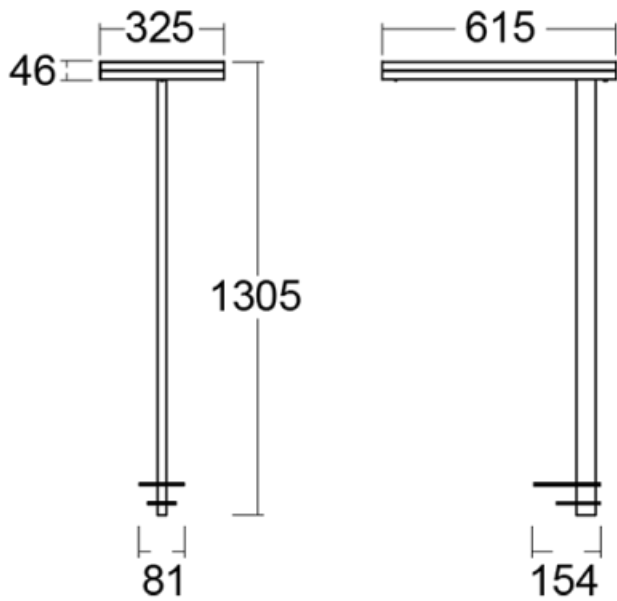

Assembly



Light distribution



Energy class

A++, A+, A

Marks



Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
130-831I-10GXX/840, W	0 x 0 x 0	73	10330	4000	-

These codes represent white luminaires with chromaticity temperature 4000K and micro-prismatic optical system.

Notes

Colour of the luminaires




Colour Temperature 4000 K cool white

Ra 0

Luminaires come in parts. Their codes are specified in the description of the specific type of luminaire.

Leira

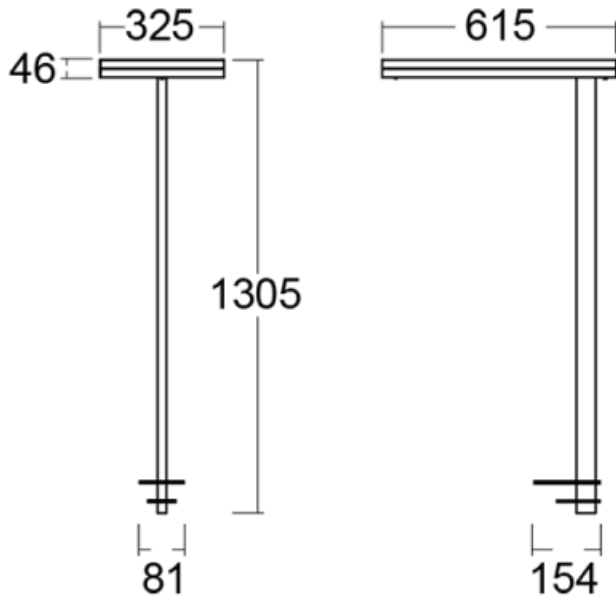

Assembly



Light distribution



Energy class

A++, A+, A

Marks



Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
130-821I-10GXX/840, W	0 x 0 x 0	73	10330	4000	-

These codes represent white luminaires with chromaticity temperature 4000K and micro-prismatic optical system.

Notes

Colour of the luminaires




Colour Temperature 4000 K cool white

Ra 0

Luminaires come in parts. Their codes are specified in the description of the specific type of luminaire.

Leira

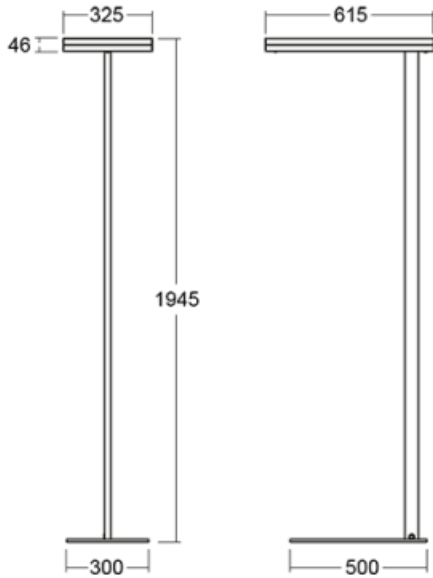

Assembly



Light distribution



Energy class

A++, A+, A

Marks



Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
130-721I-10GXX/840, W	0 x 0 x 0	73	10330	4000	-

These codes represent white luminaires with chromaticity temperature 4000K and micro-prismatic optical system.

Notes

Colour of the
luminaires











Colour Temperature 4000 K cool white

Ra 0




Luminaires come in parts. Their codes are specified in the description of the specific type of luminaire.

Legend

Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights

Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

Light source

	Tunable White adjusting the color temperature		RealWhite true display of white color
	RealColour true display of colors Ra≥97		StrongColour highlight one color

Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size
	IP code indicating the degree of protection of live parts
	Eurasian Conformity

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









Optic system

C	Clear cover	L	Plain aluminium reflector
D	Asymmetric reflector	M	Matt parabolic louvre
E	Polished parabolic louvre, high LOR	S	SPOT - narrow angle
F	FLOOD - wide angle	U	MEDIUM - middle angle
I	Microprismatic optical system	W	Wide beam angle
K	Opal diffuser		

Electrical connection

D	DALI dimmable	P	Sensor and electronic ballast
E	Electronic ballast non-dimmable	T	By switch dimmable (touch dimm)
M	Electronic ballast non-dimmable with 1h emergency	TD	DALI or by switch (touch dimm) dimmable
M3	Electronic ballast non-dimmable with 3h emergency	U	Dimmable luminaire with dimmer on the luminaire

Colour

W	 White	B	 Black	S	 Silver
1021	 RAL 1021	3000	 RAL 3000	6021	 RAL 6021
7006	 RAL 7006	7045	 RAL 7045		