



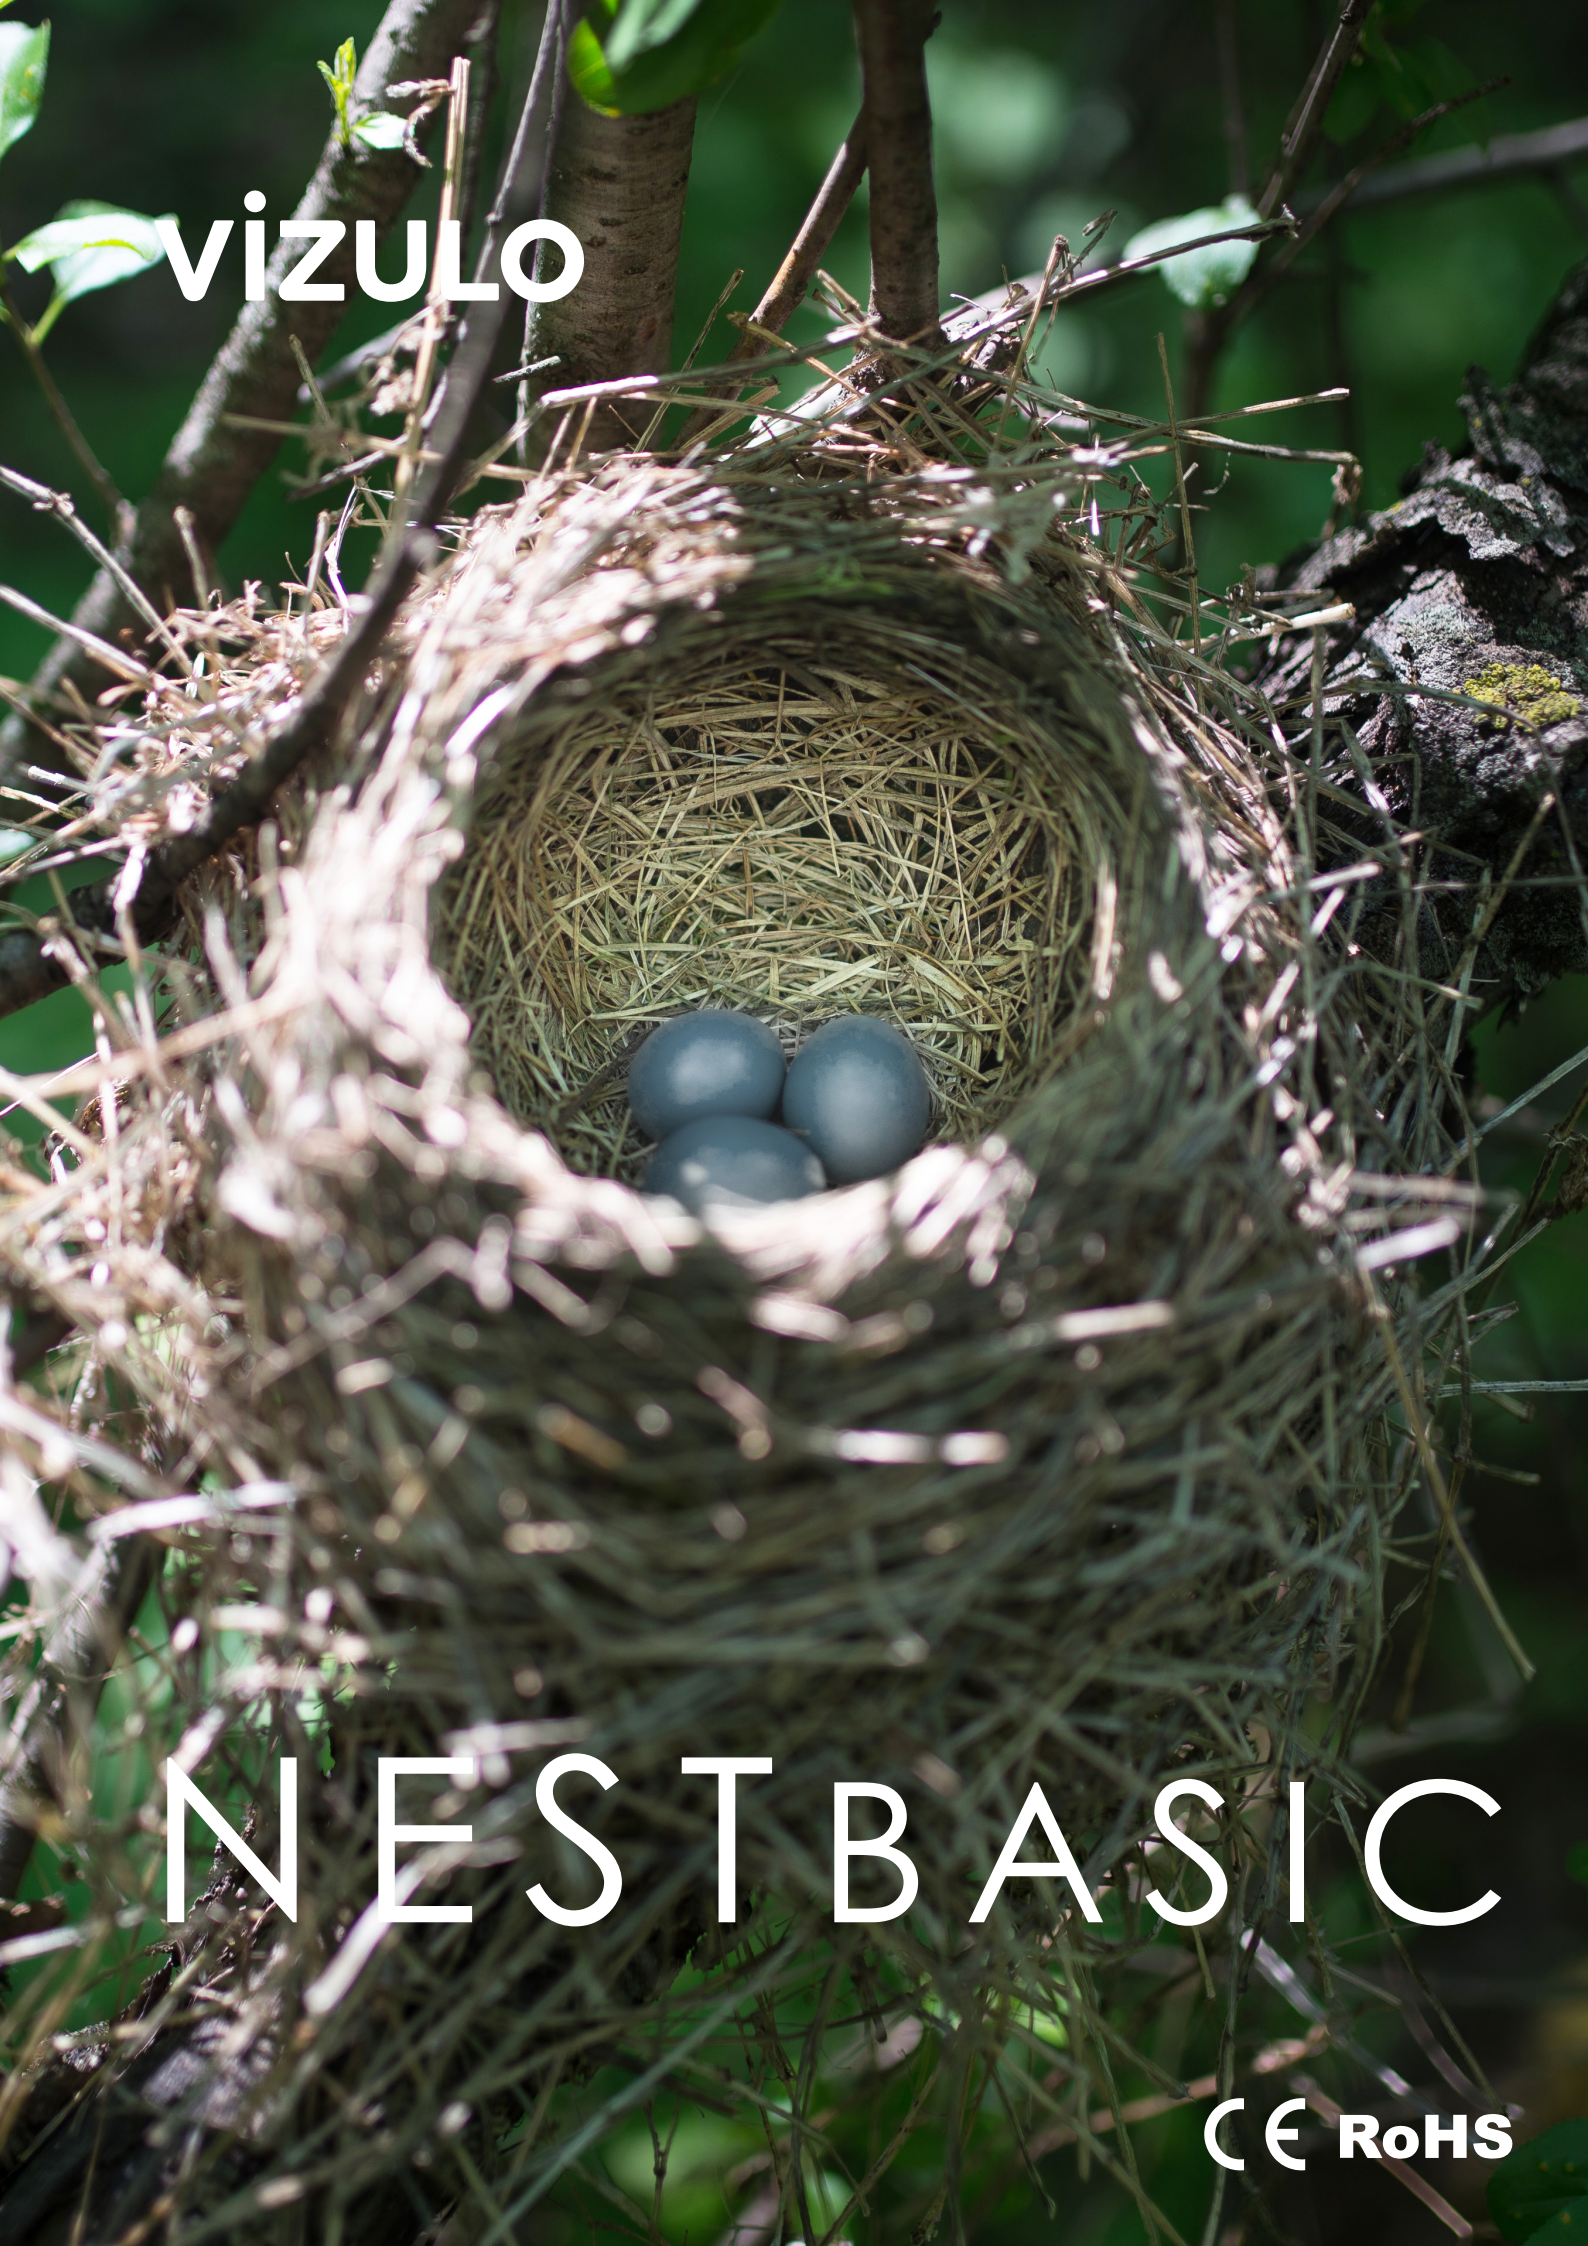

vizulo

NESTBASIC


CE RoHS

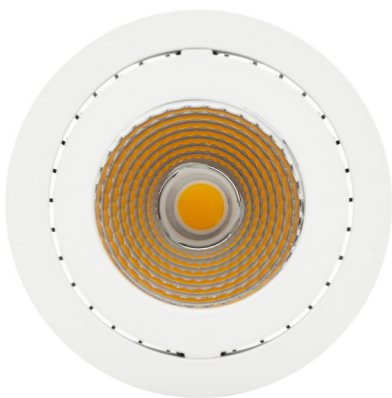


COLOR OPTIONS

RAL9016


DIMENSIONS

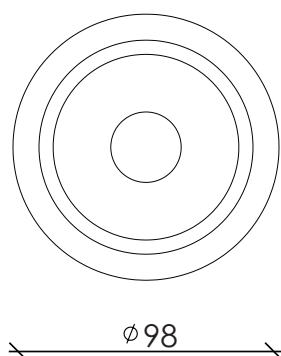


OPTICS

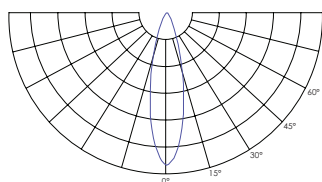

Glass cover 24°

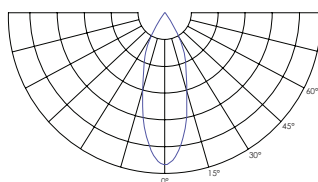

Glass cover 36°

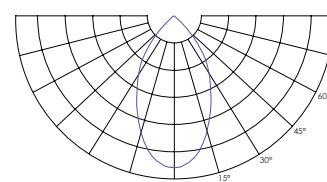

Glass cover 60°

TYPE OF DIFFUSER


Glass

TECHNICAL INFORMATION

Voltage	220 ... 240 V
Frequency	50 Hz
Power	8/12 W
Luminous flux	775... 1320 lm
Luminous efficacy	96... 110 lm/W
Distribution angle	24°/36°/60°
Tilt	0°... 15°
Color rendering index	> 80
Correlated color temperature	3000; 4000 K
Chromaticity tolerance (initial MacAdam)	3
Power factor	> 0,8
Ambient temperature	+10 ... +35 °C
Ingress protection	IP20
Insulation class	Class II
Body material	Aluminium
Body material	White
Cover type	Clear glass
Dimming	DALI
Service life	50 000 h (L90B50) at Ta = 25 °C 100 000 h (L80B50) at Ta = 25 °C
Warranty	3... 5 years (depending on modification)

Technical parameters for final product can differ from typical data by 10% due to special conditions of LED manufacturing processes.

ACCESSORIES



70042016 Connection cable 5x1.5mm²
(x2.5m) with open end



70042018 Connection cable 3x1.5mm²
(x2.5m) with open end

70042019 Connection cable 3x2.5mm²
(x2.5m) with open end



70042020 Connection cable 2x1.5mm²
(x2.5m) with open end

70042021 Connection cable 2x2.5mm²
(x2.5m) with open end



70042022 Connection cable 3x1.5mm²
(x2.5m) with plug

70042023 Connection cable 2x1.5mm²
(x2.5m) with plug

ACCESSORIES



70042010 Connection cable 2x1.5mm² (x2.5m)
with Ensto(NAC21S.W) 2-way plug

70042015 Connection cable 2x2.5mm² (x2.5m)
with Ensto(NAC21S.W) 2-way plug



70042009 Connection cable 5x1.5mm² (x2.5m)
with Ensto(NAC51S.W) 5-way plug



70042008 Connection cable 2x1.5mm² (x2.5m)
with Wago Winsta(770-112/041-000) 2-way plug

70042013 Connection cable 2x2.5mm² (x2.5m)
with Wago Winsta(770-112/041-000) 2-way plug



70042007 Connection cable 5x1.5mm² (x2.5m)
with Wago Winsta(770-115) 5-way plug

70042030 Connection cable with DALI 5x1.5mm² (x2.5m)
with Wago Winsta(770-1115) 5-way plug

MODEL NAME PRINCIPLES

