


VIZULO

STELLAR



CE

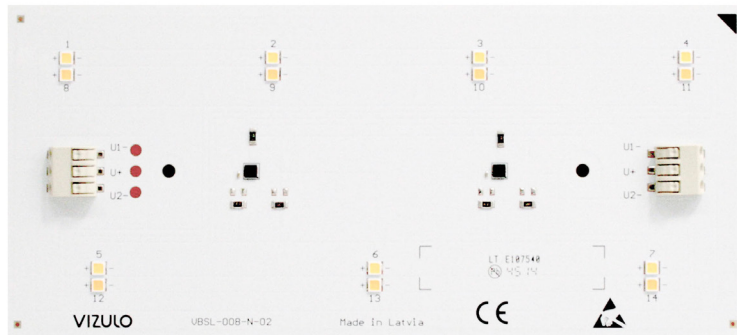

COLOR OPTIONS



DIMENSIONS

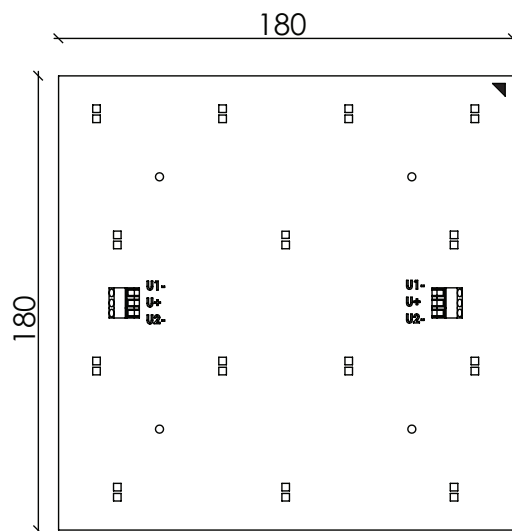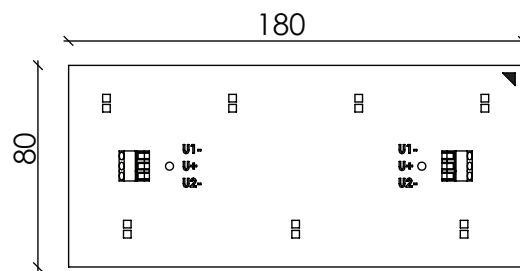

TECHNICAL INFORMATION

Voltage	24 V	
Frequency	- Hz	
Power	4,8 W (without driver)	2,4 W (without driver)
Luminous flux	620	310
Luminous efficacy	129 lm/W (without driver)	129 lm/W (without driver)
Color rendering index	> 80	
Correlated color temperature	4000 K	
Chromaticity tolerance (initial MacAdam)	3	
Ambient temperature	0 ... +45 °C	
Ingress protection	IP00	
Dimensions	180x180 mm/ 180x80 mm	
Service life	50 000 h (L80B10) at Ta = 25°C	
Warranty	5 years	

Technical parameters for final product can differ from typical data by 10% due to special conditions of LED manufacturing processes.

ARTICLE

Article	Model No.	Description
71000011	VASL-018-N-840-830-05	VIZULO Stellar LED Line S180 840/830
71000012	VASL-008-N-840-830-02	VIZULO Stellar LED Line S080 840/830
71000014	VASL-008-N-840-01	VIZULO Stellar LED Line S080 840
71000015	VASL-018-N-840-01	VIZULO Stellar LED Line S180 840