


MATRIC 55 MM
WALL DIRECT | D3



DE LED-Wand-Anbauleuchte. Rein Direktstrahlend. Lichtkanal aus Aluminiumprofil mit 55mm Lichtspur-Breite. Millimetergenaue Längenfertigung nach Vorgabe möglich. Oberfläche naturel oxidiert oder weiß, graphit, schwarz, champagner oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik und Satin-Louvier für Office-Anwendungen. Opaldiffusor aus satiniertem Acrylglas für Allgemeinbeleuchtung. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (1-10V, DALI, Touch-Dim, Casambi). Farbtemperaturen 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial \leq MacAdam 3. Farbwiedergabe $a > 80$ oder CRI > 90 . Auf Anfrage: Integration von Notlichtkomponenten, Sensortechnologie.

EN LED wall mounted luminaire. Direct only light distribution. Light channel made of aluminium profile with 55mm track width. Precise length production according to specifications possible. Surface natural anodised or white, graphite, black, champagne or copper coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic and satin louver for office purposes. Opal diffuser made of acrylic glass for general lighting. Converter integrated into luminaire housing, optionally switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi). Colour temperatures 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning initial \leq MacAdam 3. Colour rendering CRI > 80 or CRI > 90 . On request: Integration of emergency lighting components, sensor technology.

FR Applique murale LED. Éclairage seulement direct. Rail lumineux en profilé d'aluminium avec une largeur d'éclairage de 55mm. Fabrication au millimètre près des longueurs selon les spécifications. Surface anodisée ou laquée blanc, graphite, noir, champagne ou cuivre. Autres options de finition voir Lightnet-Surface-Collection ou RAL au choix. Optique microprismatique et satin louver pour postes de travail. Diffuseur opale en verre acrylique pour éclairage général. Driver intégré dans le luminaire, au choix ON/OFF ou graduable (1-10V, DALI, Touch-Dim, Casambi). Température de couleur 2200K, 2700K, 3000K, 3500K, 4000K ou 6500K. Binning initial \leq MacAdam 3. Rendu de couleur CRI > 80 ou CRI > 90 . Sur demande: Intégration de composants d'éclairage de secours ou de capteurs.

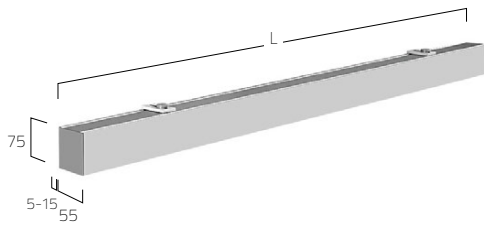


PRODUCT-CODE: L D3 A E E - 8 30 M - L890

PRODUCT FAMILY	- L: Matric
TYPE	- D3: Wall-mounted Direct Only
OPTICAL SYSTEM	- A: Microprismatic, O: Opal, M: Satin Louver,
SURFACE FINISH	- W: Snow White, E: Silver Anodised, U: Urban Graphite, B: Jet Black, H: Champagne Silver, K: Satin Copper
CONTROL GEAR	- E: On/Off, L: DALI, D: 1-10V, H: Touch-Dim
COLOUR REND.	- 8: CRI > 80 , 9: CRI > 90 , F: Full Spectrum
COLOUR TEMP.	- 22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K
POWER	- E: Low Power, M: Medium Power, H: High Power
SIZE	- Luminaire length in mm: L600, L890, L1182, L1475, L1765, L2055
ON REQUEST	- Special Length Versions, 90°-Elements, Midpin&Midpoint Spotlights/Downlights, Emergency Module, Multisensor, Casambi, 3-Phase Track




MICROPRISMATIC | DIRECT




UGR \leq 19 for Low Power (X=4H, Y=8H, S=0.25H) DIRECT 100%

OPAL DIFFUSER | DIRECT



DIRECT 100%

SATIN LOUVER | DIRECT



UGR \leq 19 for Medium Power (X=4H, Y=8H, S=0.25H) DIRECT 100%

L mm	Lumen/Watt Low Power	Lumen/Watt Medium Power	Lumen/Watt High Power
600	780lm/8W	1300lm/13W	1890lm/19W
890	1170lm/12W	1950lm/19W	2830lm/28W
1182	1560lm/15W	2600lm/24W	3780lm/36W
1475	1950lm/17W	3250lm/29W	4720lm/44W
1765	2340lm/20W	3900lm/34W	5670lm/52W
2055	2730lm/23W	4550lm/39W	6610lm/58W

L mm	Lumen/Watt Low Power	Lumen/Watt Medium Power	Lumen/Watt High Power
600	830lm/8W	1390lm/13W	2010lm/19W
890	1250lm/12W	2080lm/19W	3020lm/28W
1182	1660lm/15W	2770lm/24W	4030lm/36W
1475	2080lm/17W	3470lm/29W	5040lm/44W
1765	2490lm/20W	4160lm/34W	6040lm/52W
2055	2910lm/23W	4850lm/39W	7050lm/58W

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
600	940lm/13W	1360lm/19W
890	1400lm/19W	2040lm/28W
1182	1870lm/24W	2720lm/36W
1475	2340lm/29W	3400lm/44W
1765	2810lm/34W	4080lm/52W
2055	3270lm/39W	4760lm/58W

Lumen Values: Luminaire luminous flux at 4000K/CRI >80 . Other configurations on request.



90° CORNER OPAL DIFFUSER | MICROPRISMATIC

MIDPIN-DOWNLIGHT 770lm / 11W / \varnothing 37mm

MIDPIN-SINGLE SPOTLIGHT 770lm / 11W / \varnothing 37mm

3-PHASE TRACK COMPATIBLE WITH GLOBAL-ADAPTORS

MULTISENSOR DAYLIGHT & PRESENCE



SNOW WHITE

SILVER ANODISED

URBAN GRAPHITE

JET BLACK

CHAMPAGNE SILVER

SATIN COPPER