



CALEO INVERSE
SURFACE | A3

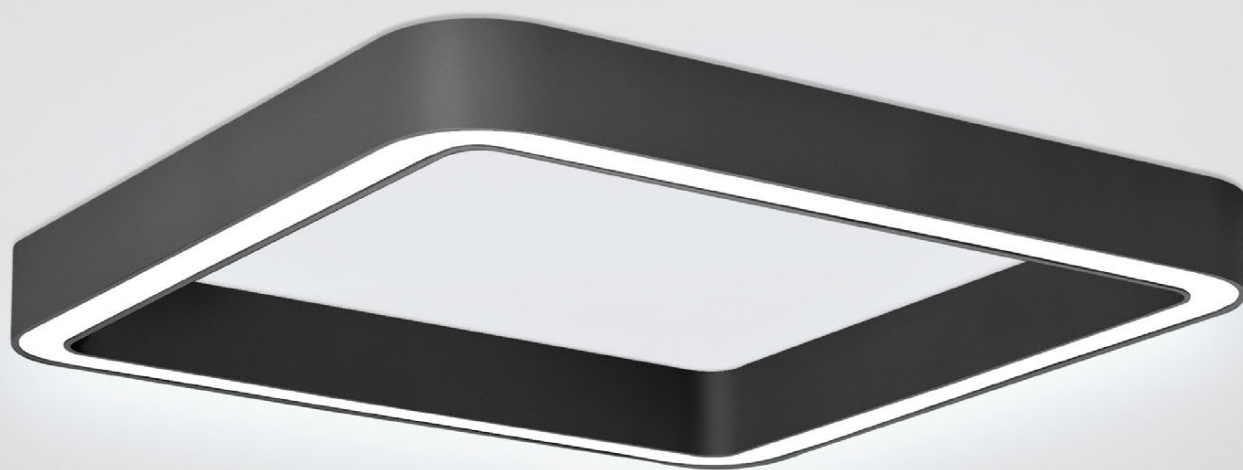

DE LED-Anbauleuchte. Rein Direktstrahlend. Leuchtenkörper aus Aluminiumprofil. Oberfläche silber, weiß, graphit, schwarz, champagner oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Opaldiffusor aus satiniertem Acrylglas für Allgemeinbeleuchtung. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (1-10V, DALI, Touch-Dim, Casambi). Farbtemperaturen 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial ≤ MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90. Lieferung Leuchtgehäuse erfolgt als fertig montierbare Einheit für einfache Installation und durchgehend homogene Auflösung der Lichtpunkte.

EN LED surface-mounted luminaire. Direct only light distribution. Luminaire body made of aluminum profile. Surface silver, white, graphite, black, champagne or copper coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Opal diffuser made of acrylic glass for general lighting. Converter integrated into luminaire housing, optionally switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi). Colour temperatures 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning initial ≤ MacAdam 3. Colour rendering CRI>80 or CRI>90. The luminaire housing is supplied as a ready-to-mount unit for easy installation and uniform and enhanced light transmission.

FR Luminaire LED en saillie. Éclairage seulement direct. Corps du luminaire en profilé aluminium. Surface laquée argent, blanc, graphite, noir, champagne ou cuivre. Autres options de finition voir Lightnet-Surface-Collection ou RAL au choix. Diffuseur opale en verre acrylique pour éclairage général. Driver intégré dans le luminaire, au choix ON/OFF ou graduable (1-10V, DALI, Touch-Dim, Casambi). Température de couleur 2200K, 2700K, 3000K, 3500K, 4000K ou 6500K. Binning initial ≤ MacAdam 3. Rendu de couleur CRI>80 ou CRI>90. Le corps du luminaire est livré sous forme d'unité prête au montage pour une installation facile et une résolution homogène et continue des points lumineux.

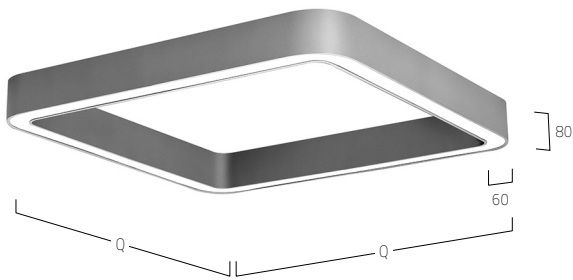


PRODUCT-CODE: A A3 O S E - 8 30 M - Q950

PRODUCT FAMILY	- A Caleo
TYPE	- A3 Direct Only
OPTICAL SYSTEM	- O Opal, A Microprismatic
SURFACE FINISH	- W Snow White, S Radiant Silver, U Urban Graphite, B Jet Black, H Champagne Silver, K Satin Copper
CONTROL GEAR	- E On/Off, L DALI, D 1-10V, H Touch-Dim, C Casambi
COLOUR REND.	- 8 CRI>80, 9 CRI>90, F Full Spectrum
COLOUR TEMP.	- 22 2200K, 27 2700K, 30 3000K, 35 3500K, 40 4000K, 65 6500K
POWER	- M Medium Power, H High Power
SIZE	- Square Size in mm: Q950 Q1245 Q1530
ON REQUEST	- Emergency Module




MICROPRISMATIC / DIRECT



DIRECT: 100%

OPAL DIFFUSER / DIRECT



DIRECT: 100%

Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power
950	5000lm/50W	7310lm/81W
1245	6670lm/66W	9750lm/104W
1530	8340lm/81W	12190lm/132W

Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power
950	4180lm/50W	6110lm/81W
1245	5570lm/66W	8150lm/104W
1530	6970lm/81W	10190lm/132W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80 / surface finished Snow White. Other configurations on request.

