


CUBIC EVOLUTION SUSPENDED | U4



DE LED-Pendelleuchte. Rein indirektstrahlend. Leuchtenkörper in minimalistischer Bauhöhe aus Aluminiumprofil. Oberfläche natureloxiert oder weiß, graphit, schwarz bzw. champagnerfarben lackiert sowie Alu poliert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (1-10V, DALI, Touch-Dim). Farbtemperaturen 2700K, 3000K, 3500K oder 4000K. Binning initial \leq MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90. Stufenlos höhenverstellbare Y-Seil- oder Parallel-Seilabhängung mit transparent ummantelter Zuleitung. Auf Anfrage: Integration von einzelnen Midpin Spotlights nach Vorgabe oder von 3-Phasen-Stromschienen für akzentuiertes direktes Licht.

EN LED pendant luminaire. Indirect only light distribution. Luminaire body with minimalistic overall height made of aluminium profile. Surface natural anodised or white, graphite, black or champagne coated as well as polished aluminium. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Driver integrated into luminaire housing, optionally switchable or dimmable (1-10V, DALI, Touch-Dim). Colour temperature 2700K, 3000K, 3500K or 4000K. Binning initial \leq MacAdam 3. Colour rendering CRI>80 or CRI>90. Height adjustable Y-cord suspension or parallel-cord suspension with transparent power supply cable. On request: Integration of single Midpin spotlights according to specifications or 3-phase tracks for accentuated direct light.

FR Luminaire LED suspendu. Éclairage seulement indirect. Corps du luminaire en profilé aluminium et épaisseur minimaliste. Surface anodisée ou laquée blanc, graphite, noir, champagne ou polie. Autres options de finition voir Lightnet-Surface-Collection ou RAL au choix. Driver intégré dans le luminaire, au choix ON/OFF ou graduable (1-10V, DALI, Touch-Dim). Température de couleur 2700K, 3000K, 3500K ou 4000K. Binning initial \leq MacAdam 3. Rendu de couleur CRI>80 ou CRI>90. Filin et tendeur rapide réglable en Y ou filin parallèle droit avec câble d'alimentation transparent. Sur demande: Intégration de spot Midpin individuel selon les spécifications ou de rails triphasés pour une lumière directe accentuée.

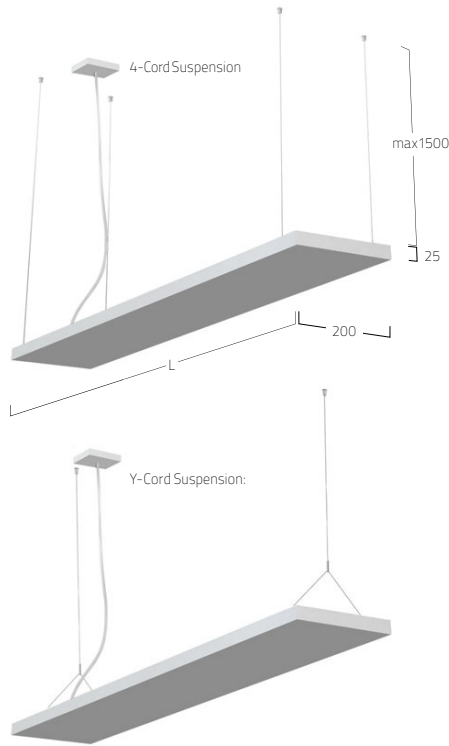


PRODUCT-CODE: C U4 U B E - 8 30 M - L900 - Y

PRODUCT FAMILY	- C: Cubic
TYPE	- U4: Suspended Indirect Only
OPTICAL SYSTEM	- U: Indirect Optic
SURFACE FINISH	- W: Snow White, E: Silver Anodised, U: Urban Graphite, B: Jet Black, H: Champagne Silver
CONTROL GEAR	- E: On/Off, L: DALI, D: 1-10V, H: Touch-Dim
COLOUR REND.	- 8: CRI>80, 9: CRI>90
COLOUR TEMP.	- 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K
POWER	- M: Medium Power, H: High Power
SIZE	- Luminaire Length in mm L900, L1200, L1500, L1800, L2100
SUSPENSION	- Y: Y-Cord Suspension, K: 4-Cord Suspension
ON REQUEST	- Integration of Midpin Spotlights, Integration of 3-Phase Track, Cable colour: Red, Black



INDIRECT OPTIC



INDIRECT 100%


L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
900	4300lm/32W	5570lm/43W
1200	5730lm/41W	7430lm/55W
1500	7170lm/50W	9280lm/67W
1800	8600lm/59W	11140lm/79W
2100	10030lm/73W	12990lm/98W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.



INTEGRATION OF MIDPIN SPOTLIGHTS

INTEGRATION OF 3-PHASE TRACK

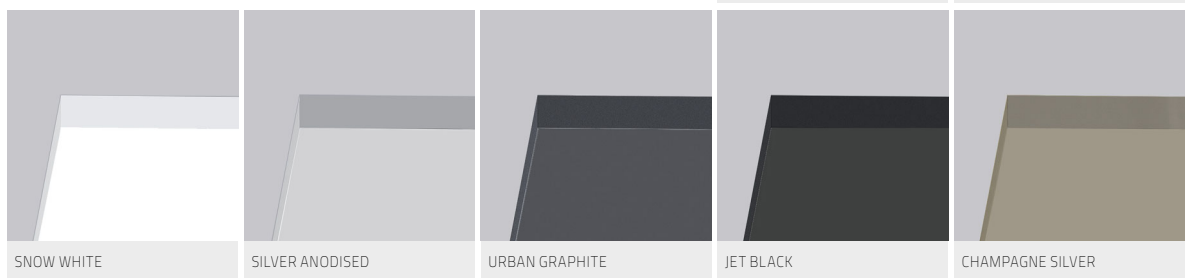

SNOW WHITE

SILVER ANODISED

URBAN GRAPHITE

JET BLACK

CHAMPAGNE SILVER