




THREE PEAKS  
SURFACE | A



**DE** LED- Anbauleuchte. Rein Direktstrahlend. Leuchtenkörper aus Aluminiumprofil in unterschiedlichen Formen erhältlich. Oberfläche silber, weiß, graphit, schwarz, champagner oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (1-10V, DALI, Touch-Dim, Casambi). Farbtemperaturen 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial  $\leq$  MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90.

**EN** LED surface-mounted luminaire. Direct only light distribution. Luminaire body made of aluminium profile available in various shapes. Surface silver, white, graphite, black, champagne or copper coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting. Converter integrated into luminaire housing, optionally switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi). Colour temperatures 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning initial  $\leq$  MacAdam 3. Colour rendering CRI>80 or CRI>90.

**FR** Luminaire LED en saillie. Éclairage seulement direct. Luminaire triangulaire en profilé aluminium disponible sous différentes formes. Surface laquée argent, blanc, graphite, noir, champagne ou cuivre. Autres options de finition voir Lightnet-Surface-Collection ou RAL au choix. Diffuseur microprismatique optimisé pour un éblouissement limité et adapté aux bureaux. Diffuseur opale satinée pour un éclairage général. Driver intégré dans le luminaire, au choix ON/OFF ou graduable (1-10V, DALI, Touch-Dim, Casambi). Température de couleur 2200K, 2700K, 3000K, 3500K, 4000K ou 6500K. Binning initial  $\leq$  MacAdam 3. Rendu de couleur CRI>80 ou CRI>90.

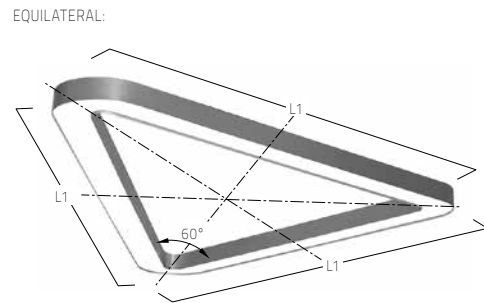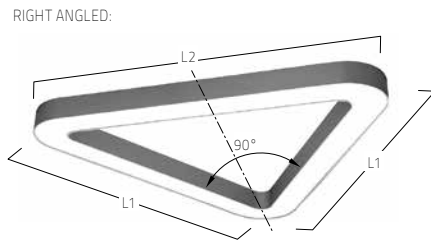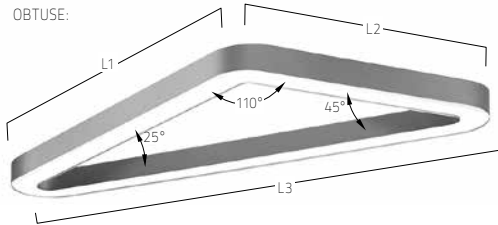


**PRODUCT-CODE:** Y A1 A S E - 8 30 M - L930

PRODUCT FAMILY	- Y: Three Peaks
TYPE	- A1: Obtuse Direct A2: Right Angled Direct A3: Equilateral Direct
OPTICAL SYSTEM	- O: Opal, A: Microprismatic
SURFACE FINISH	- W: Snow White, S: Radiant Silver, U: Urban Graphite, B: Jet Black, H: Champagne Silver, K: Satin Copper
CONTROL GEAR	- E: On/Off, L: DALI, D: 1-10V, H: Touch-Dim, C: Casambi
COLOUR REND.	- 8: CRI>80, 9: CRI>90, F: Full Spectrum
COLOUR TEMP.	- 22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K
POWER	- M: Medium Power, H: High Power
SIZE	- A1: Luminaire L1 length in mm: L930, L1315, L1615 A2: Luminaire L1 length in mm: L740, L935, L1230 A3: Luminaire L1 length in mm: L840, L1130, L1420
ON REQUEST	- Emergency Module




MICROPRISMATIC / DIRECT



DIRECT: 100%

OPAL DIFFUSER / DIRECT



DIRECT: 100%

L mm	Lumenlm/Watt Medium Power	Lumenlm/Watt High Power
------	---------------------------	-------------------------

A1: OBTUSE

930	6810lm/52W	9920lm/84W
1315	9810lm/74W	14290lm/121W
1615	12260lm/92W	17860lm/147W

A2: RIGHT ANGLED

740	5990lm/46W	8710lm/75W
935	7890lm/60W	11490lm/96W
1230	10620lm/80W	15460lm/130W

A3: EQUILATERAL

840	6530lm/50W	9510lm/81W
1130	8980lm/68W	13080lm/107W
1420	11440lm/85W	16650lm/138W

L mm	Lumenlm/Watt Medium Power	Lumenlm/Watt High Power
------	---------------------------	-------------------------

A1: OBTUSE

930	5870lm/52W	8550lm/84W
1315	8450lm/74W	12310lm/121W
1615	10570lm/92W	15390lm/147W

A2: RIGHT ANGLED

740	5160lm/46W	7510lm/75W
935	6800lm/60W	9900lm/96W
1230	9150lm/80W	13320lm/130W

A3: EQUILATERAL

840	5630lm/50W	8190lm/81W
1130	7740lm/68W	11270lm/107W
1420	9860lm/85W	14350lm/138W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80 / surface finished Snow White. Other configurations on request.