


# CAVER LED

## Outdoor Accent Lighting



**Images for the product family and options:**



**Description:** Surface mounted accent LED luminaire  
 Light distribution type: direct  
 Optical system: lenses, clear polycarbonate diffuser, impact resistant  
 Housing: aluminium  
 Colour: light grey

**General data:** Mains voltage: 220-240V, 50/60Hz  
 LED lifetime, h: 100000/L90B10  
 SDCM: 3  
 Protection class IEC: I  
 Ingress protection code: IP66  
 Mechanical impact resistance: IK09  
 Operating temperature range, °C: ta -25...+40

**Installation:** On the wall (mounting brackets included). Cable, 1.0m, 3x0.75mm2

**Environment:** Outdoor

**Application:** Facade illumination, parking area, public space


Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI	CCT*, K	Weight, kg
Caver LED1x2900 D774 T730 LS30	380	80	170	2706	24,7	114	70+	3000	4,00
Caver LED1x2900 D774 T730 LS45	380	80	170	2706	24,7	114	70+	3000	4,00
Caver LED1x2900 D774 T730 LS60	380	80	170	2706	24,7	114	70+	3000	4,00
Caver LED1x2900 D774 T730 LS90	380	80	170	2706	24,7	114	70+	3000	4,00
Caver LED1x2900 D774 T730 LSA1	380	80	170	2706	24,7	114	70+	3000	4,00
Caver LED1x2900 D774 T730 LSA2	380	80	170	2706	24,7	114	70+	3000	4,00
Caver LED1x2900 D774 T730 LSM1	380	80	170	2706	24,7	114	70+	3000	4,00
Caver LED1x2900 D774 T740 LS30	380	80	170	2819	24,7	114	70+	4000	4,00
Caver LED1x2900 D774 T740 LS45	380	80	170	2819	24,7	114	70+	4000	4,00
Caver LED1x2900 D774 T740 LS60	380	80	170	2819	24,7	114	70+	4000	4,00
Caver LED1x2900 D774 T740 LS90	380	80	170	2819	24,7	114	70+	4000	4,00
Caver LED1x2900 D774 T740 LSA1	380	80	170	2819	24,7	114	70+	4000	4,00
Caver LED1x2900 D774 T740 LSA2	380	80	170	2819	24,7	114	70+	4000	4,00
Caver LED1x2900 D774 T740 LSM1	380	80	170	2819	24,7	114	70+	4000	4,00

\*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

**Available options:**

DALI	Driver with DALI interface and switch-control dimming	LSA2	Optics with asymmetric beam SA2
LS30	Optics with 30x30° beam angle	LSM1	Optics with asymmetric beam SM1
LS45	Optics with 45x45° beam angle	T730	Colour temperature 3000K, CRI 70+
LS60	Optics with 60x60° beam angle	T740	Colour temperature 4000K, CRI 70+
LS90	Optics with 90x90° beam angle	T750	Colour temperature 5000K, CRI 70+
LSA1	Optics with asymmetric beam SA1		

**TECHNICAL DATA SHEET**

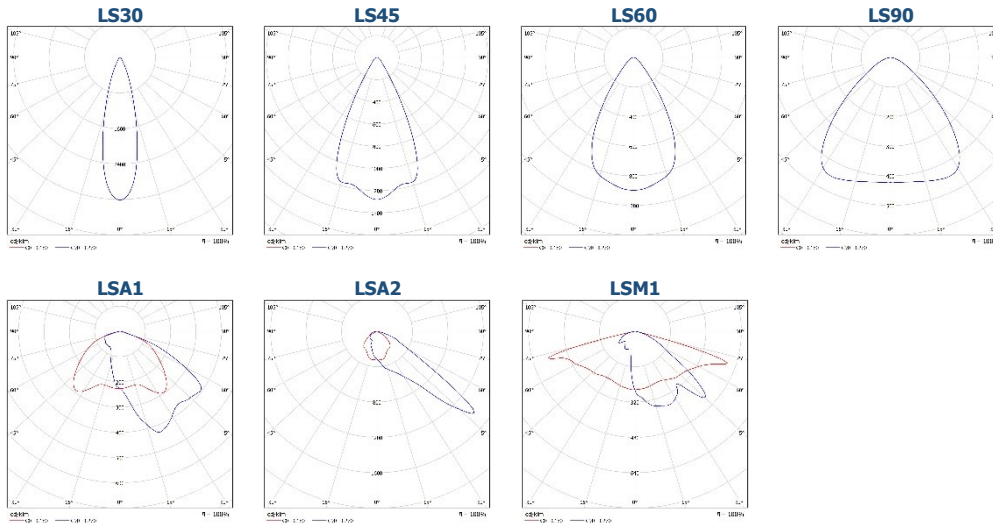

**Available accessories:**



Product: Power supply connector - IP66/IP68, 3x1.5mm<sup>2</sup>

Description: Quick and easy to connect power supply and luminaire cable connector - IP66/IP68, 3x1.5mm<sup>2</sup>, 400V/16A, 1pcs

**Applications:**

