


PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE 2200K TV 24V 85CRI 4.5W 276LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2101-SL
Product Range	Ultimo Neon 10

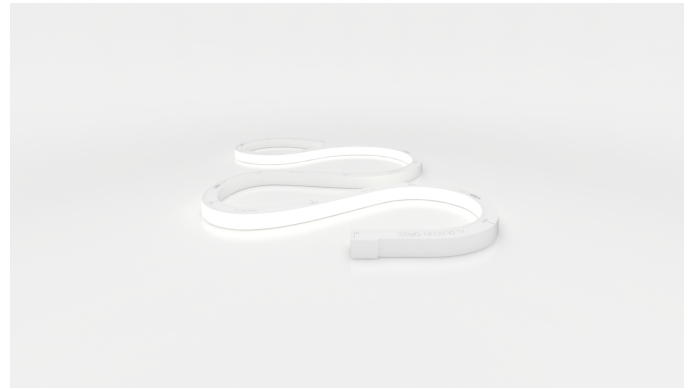

PRODUCT SPECIFICATION


Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	2200K
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	276.00lm/m
Lumen Efficiency	61.33lm/w
Max Power Length	15000mm
Beam Angle	120°




TECHNICAL DRAWING



PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE 2700K TV 24V 84CRI 4.5W 316.6LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2102-SL
Product Range	Ultimo Neon

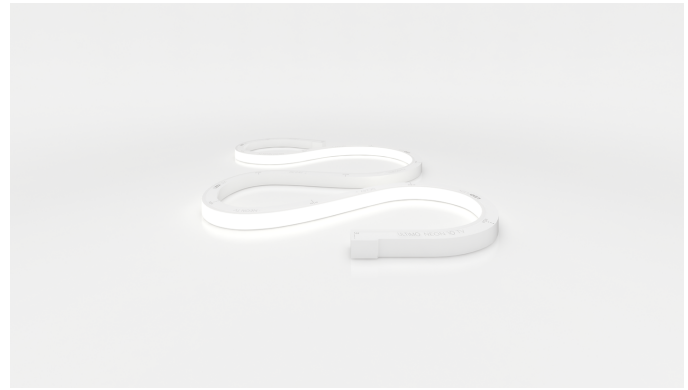

PRODUCT SPECIFICATION


Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	2700K
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	316.60lm/m
Lumen Efficiency	70.36lm/w
Max Power Length	15000mm
Beam Angle	120°




TECHNICAL DRAWING

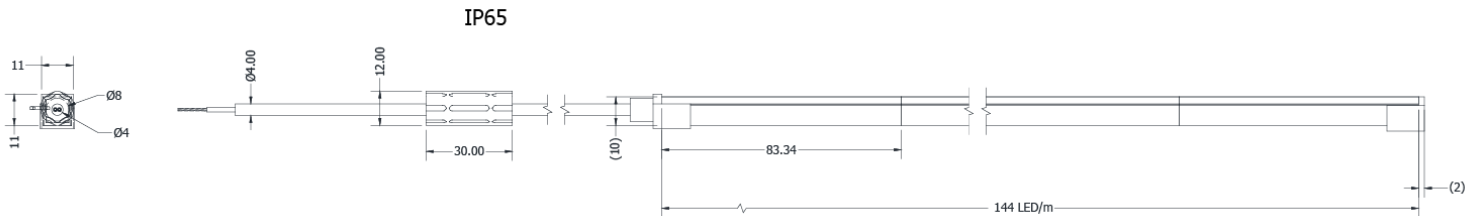

PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE 4000K TV 24V 84CRI 4.5W 316LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2104-SL
Product Range	Ultimo Neon

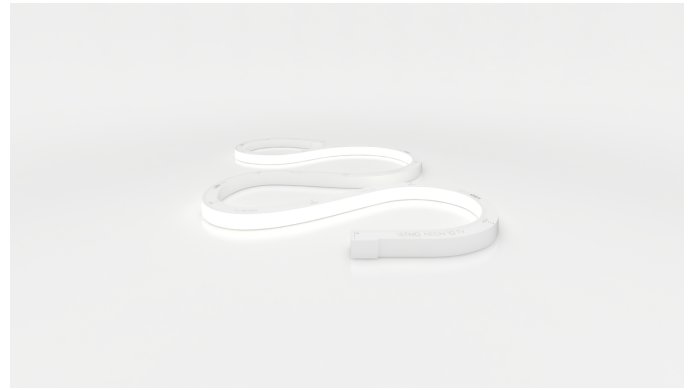

PRODUCT SPECIFICATION


Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	4000K
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	316.00lm/m
Lumen Efficiency	70.22lm/w
Max Power Length	15000mm
Beam Angle	120°



TECHNICAL DRAWING

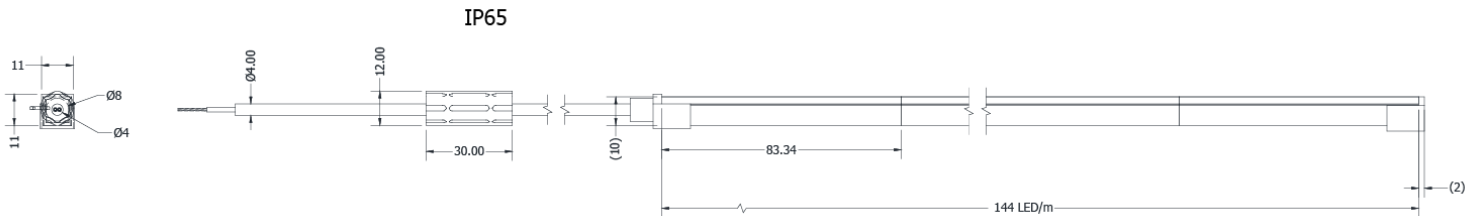


PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE 5700K TV 24V 83CRI 4.5W 330LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2105-SL
Product Range	Ultimo Neon

PRODUCT SPECIFICATION

Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	5700K
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

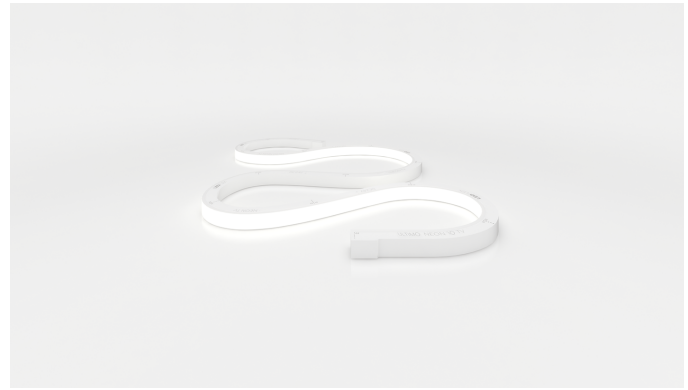


PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	330.00lm/m
Lumen Efficiency	73.33lm/w
Max Power Length	15000mm
Beam Angle	120°



TECHNICAL DRAWING

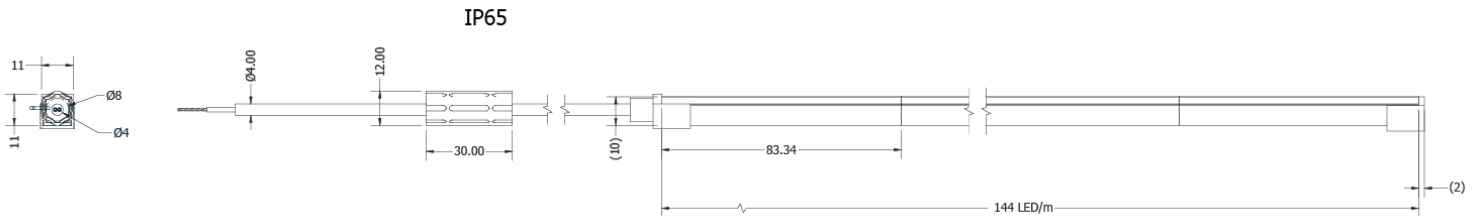

PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE 3500K TV 24V 86CRI 4.5W 325LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2106-SL
Product Range	Ultimo Neon



PRODUCT SPECIFICATION


Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	3500K
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	325.00lm/m
Lumen Efficiency	72.22lm/w
Max Power Length	15000mm
Beam Angle	120°




TECHNICAL DRAWING

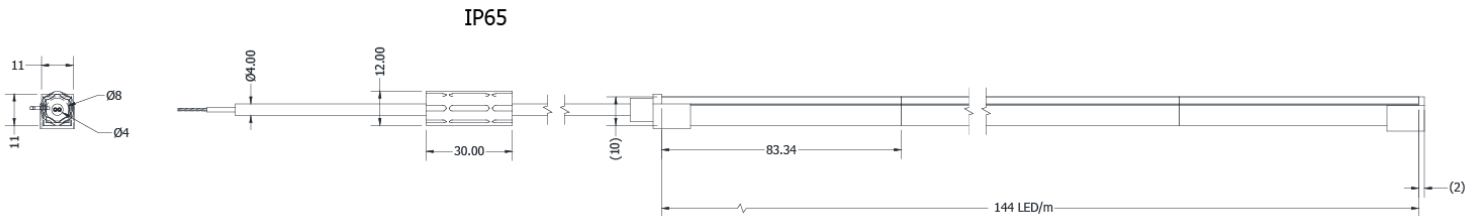

PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE GREEN TV 24V 4.5W 220LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2122-SL
Product Range	Ultimo Neon

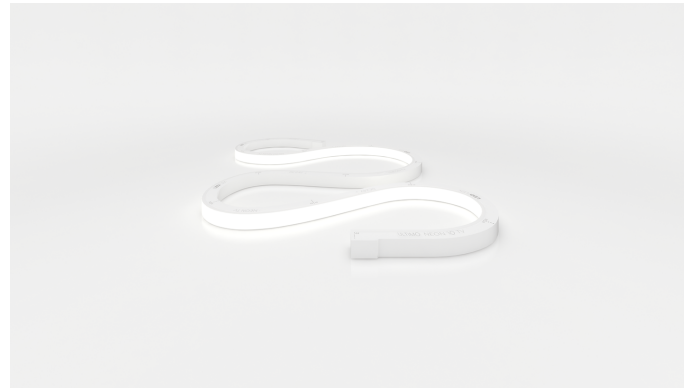

PRODUCT SPECIFICATION


Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	GREEN
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	220.00lm/m
Lumen Efficiency	49.00lm/w
Max Power Length	15000mm
Beam Angle	120°



TECHNICAL DRAWING

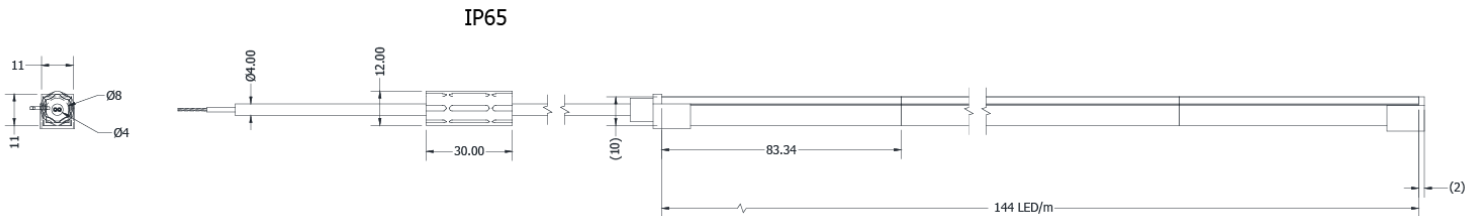

PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE RED TV 24V 4.5W 80LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2123-SL
Product Range	Ultimo Neon



PRODUCT SPECIFICATION


Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	RED
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	80.00lm/m
Lumen Efficiency	18.00lm/w
Max Power Length	15000mm
Beam Angle	120°




TECHNICAL DRAWING

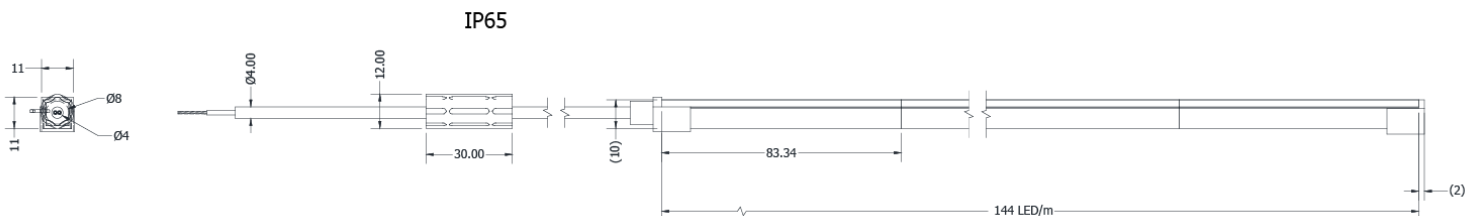

PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE BLUE TV 24V 4.5W 50LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2121-SL
Product Range	Ultimo Neon

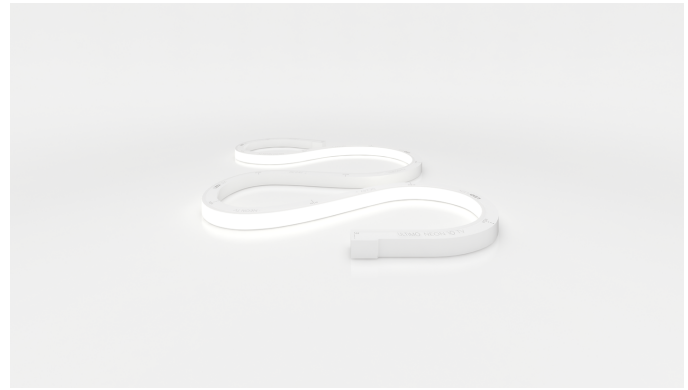

PRODUCT SPECIFICATION


Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	BLUE
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	50.00lm/m
Lumen Efficiency	12.00lm/w
Max Power Length	15000mm
Beam Angle	120°



TECHNICAL DRAWING

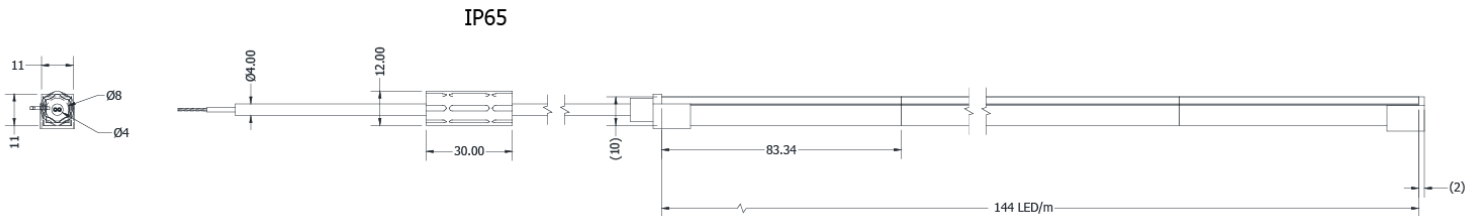


PRODUCT INFORMATION

Description	ULTIMO 10 NEON SILICONE 3000K TV 24V 85CRI 4.5W 323LM 83.3mm Cut 10mm x 10mm 1000mm (Micro Neon)
Product Code	012-2103-SL
Product Range	Ultimo Neon

PRODUCT SPECIFICATION

Dimensions	H10.00/W10.00mm
Cutting Interval	83.3mm
LED Pitch	6.9mm
Bend Direction	TV
Minimum Bend Radius	50mm
Colour Temperature	3000K
Bin/step	3SDCM
Lifetime	> 50,000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP67
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

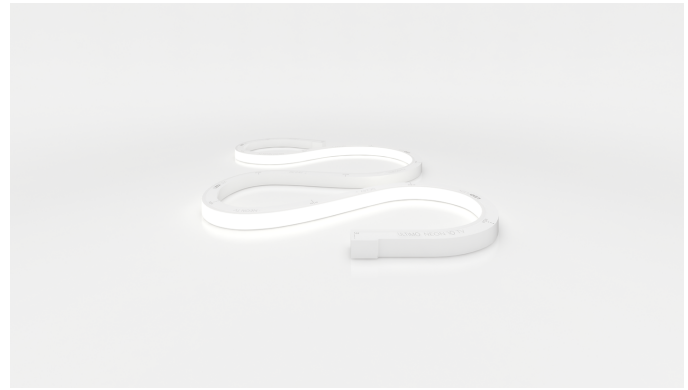

PERFORMANCE DATA (for 1000mm)

Power Consumption	4.50 W
Supply Voltage	24V DC
Supply Current	0.19 A
Luminous Flux	323.00lm/m
Lumen Efficiency	71.78lm/w
Max Power Length	15000mm
Beam Angle	120°



TECHNICAL DRAWING

