

KAGULUX SE



ITEM DESCRIPTION

KaguLux SE – a square slim design backlit panel for commercial lighting and indoor use in low and middle height T-grid ceiling applications. With this panel, we enable considerably high efficacy going up to 169lm/W resulting in a significant reduction of energy consumption.

ENVIRONMENT

- Shopping malls
- Hotel halls
- Conference rooms
- Offices
- Corridors
- Schools
- Hospitals


FEATURES & BENEFITS

- Efficacy up to 169 lm/W
- 5 years warranty

GENERAL INFORMATION


SUPPLY VOLTAGE	210-230V; 50-60 Hz
POWER FACTOR	>0.9
EFFICACY	169 lm/W
CCT	4000 K (natural white)
CRI	>80
IP CLASS	IP40
APPLICATION HEIGHT	From 2.2 up to 4 meters
OPERATING TEMP.	-20 °C ~ +50 °C
STORAGE TEMP.	-5 °C ~ +50 °C
LIFETIME	L70B10 100 000 h (Ta 25°C)
INSTALLATION	recessed
CERTIFICATION	CE and RoHS compliant
WEIGHT	1.96 kg
WARRANTY	5 years

DIMENSIONS

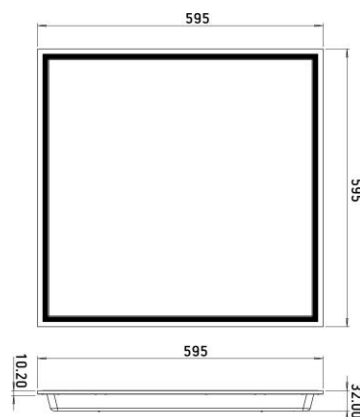

* Dimensions are in mm

LIGHT DISTRIBUTION GRAPH

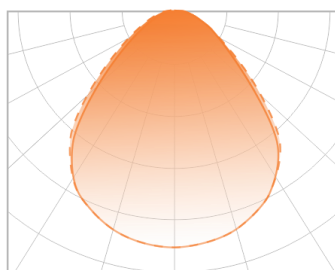

— C0-180 - - - C90-270 90°

ORDERING INFORMATION

SKU	DIFFUSER	BEAM ANGLE	POWER	LUMEN OUTPUT	CCT	DALI
BPAP-SE-6060A90840I20	diamond	90°	20 W	3370 lm	4000K	-
BPAP-SE-6060A90840I20-DA	diamond	90°	20 W	3370 lm	4000K	+